



# New Release iPoster V2.0



# **| About iPoster V2.0**



## **Feature**

- Bigger and Brighter, up to 93ft, 800 nits
- Higher Resolution, up to 640\*1024 dots
- Smarter than ever, sound and memory built-in,
- please you the pure visual and auditory enjoy
- Cutting-edge Design, slim and beauty

# Various Dimensions

## P1.9/P2.6

Display area 93ft, 125cm W\* 200cm H

Dimension : 127cm W\* 232cm H

P1.9 Resolution, 640\*1024dots

P2.6 Resolution, 480\*768dots



# Various Dimensions

## P2/P2.5

Display area 73ft, 96cm W\* 160cm H

Dimension : 98cm W\* 192cm H

P2 Resolution, 480\*800dots


P2.5 Resolution, 384\*640dots



## Wireless & Plug and play



## More details

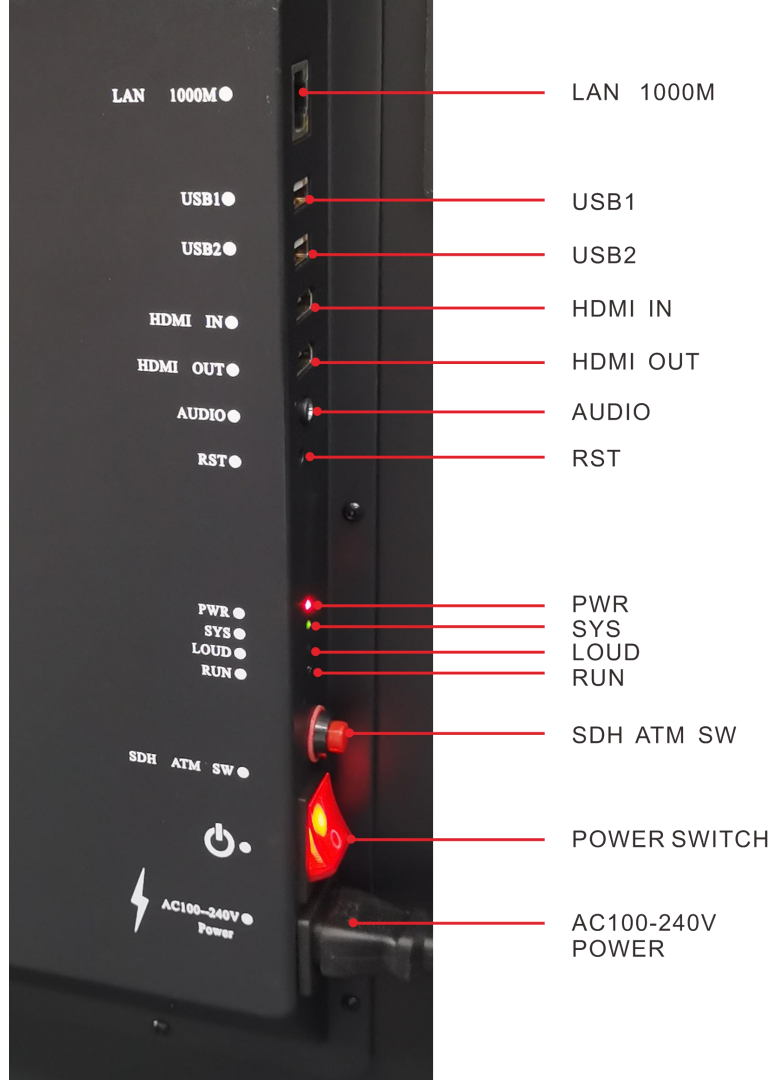

# Accessories




HDMI




Receiving card




Ribbon cable



Hub card



LED Module



Conneting plate



Asyn Sending card




AC plug



Magnet Removal Tool

## Package

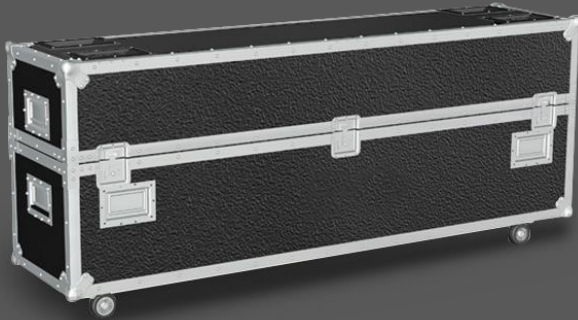

Flight case

1 in 1 , 2 in 1 , 4 in 1 are  
available



Nylon bag + Plywood case

1 iPoster for one Nylon bag  
4 iPoster for one plywood case



# Specification

Pixel Pitch	1.9mm	2.6mm	2mm	2.5mm
LED Configuration	SMD1515	SMD2020	SMD1515	SMD2020
Panel Resolution	640*1024dots	480*768dots	640*1024dots	480*768dots
Pixel Density	262,144dots/m <sup>2</sup>	147,456dots/m <sup>2</sup>	250,000dots/m <sup>2</sup>	160,000dots/m <sup>2</sup>
Module size	250*250mm		320*160mm	
Module Resolution	128*128dot	96*96dot	160*80dot	128*64dot
Display Size	1250mm * 2000mm (93ft)		960mm * 1600mm (93ft)	
External dimension	1270mm * 2320mm		980mm * 1920mm	
Cabinet Weight	150kgs		118kgs	
IP Rating ( front/back)	IP20		IP20	
Scanning Mode	1/32s		1/32s	
Brightness	600-800cd/m <sup>2</sup>		600-800cd/m <sup>2</sup>	
Viewing Angle	120°/120°		120°/120°	
View Distance	>1.9m	>2.6m	>2m	>2.5m
Gray Scale	14bit		14bit	
Colors	439.8Billion		439.8Billion	
Max.Power Consumption	1.5KW		1.5KW	
Ave.Power Consumption	0.5KW		0.5KW	
Refresh Frequency	3840Hz		3840Hz	
Environmental	Indoor		Indoor	
Brightness Adjustment	0-100 levels adjustable		0-100 levels adjustable	
Operation Power	AC100-240V 50/60Hz		AC100-240V 50/60Hz	



**Shenzhen iDisplay Technology Co.,Ltd**

---

[www.idisplayled.com](http://www.idisplayled.com)  
[hello@idisplayled.com](mailto:hello@idisplayled.com)