



PixelPitch	1.953	2.6mm	2.97mm	3.91m	4.81m	2.97mm	3.91m	4.81m	5.95m
LEDConfiguration	SMD1515	SMD1515	SMD2020	SMD2020	SMD2020	SMD1415	SMD1921	SMD1921	SMD3535
PixelDensity	262144dot/m <sup>2</sup>	147,456dot/m <sup>2</sup>	112,896dot/m <sup>2</sup>	65,536dot/m <sup>2</sup>	43,223dot/m <sup>2</sup>	112,896dot/m <sup>2</sup>	65,536dot/m <sup>2</sup>	43,223dot/m <sup>2</sup>	28224dot/m <sup>2</sup>
ModuleSize	250*250mm								
ModuleResolution	128*128	96x96dot	84x84dot	64x64dot	52x52dot	84x84dot	64x64dot	52x52dot	42*42dot
CabinetSize	500*500mmand500*1000mm								
CabinetResolution	256x256/512dot	192x192/384dot	168x168/336dot	128x128/256dots	104x104/208dots	168x168/336dot	128x128/256dots	104x104/208dots	84x84/168dots
CabinetWeight	8kg/12.5kg					9kg/13.5			
IPRating (front/back)	IP23					IP65			
ScanningMode	32s	32s	28s	16s	13s	21s	16s	13s	7s
Brightness	600-700CD/m	700-800CD/m <sup>2</sup>	700-800CD/m <sup>2</sup>	700-800CD/m <sup>2</sup>	700-800CD/m <sup>2</sup>	4000-4500CD/m <sup>2</sup>	4000-4500CD/m <sup>2</sup>	4000-4500CD/m <sup>2</sup>	5000-5500CD/m <sup>2</sup>
ViewingAngle	140°/140°								
ViewDistance	>2	>2.6m	>2.9m	>4m	>5m	>2.9m	>4m	>5m	>6m
Max.PowerConsumption	450W/m <sup>2</sup>					800W/m <sup>2</sup>			
Ave.PowerConsumption	150W/m <sup>2</sup>					280W/m <sup>2</sup>			
RefreshFrequency	3840Hz								
Environmental	Indoor					outdoor			
BrightnessAdjustment	0-100levelsadjustable								
OperationPower	AC100~24050/60Hz								

# Glovision

**iDISPLAY**

Shenzhen iDisplay Technology Co.,Ltd.

Add: 3rd Floor,5th Building, FLT industrial park, Longhua, Shenzhen, China  
 Factory: 5th Building, No.6 of Xinhua Avenue, Chengjiang, Zhongkai, Huizhou, China  
 Tel phone: 86-755-85280348  
 E-mail: hello@idisplayled.com  
 www.idisplayled.com



500x500mm

500x1000mm

## Appearance


- HANGING
- STACKING
- FLAT SCREEN
- FLOOR DANCE
- IMMERSIV
- CURVE SCREEN IN/OUT



## Five Advantages

Single person quick installation and maintenance

Anti-collision corner protector

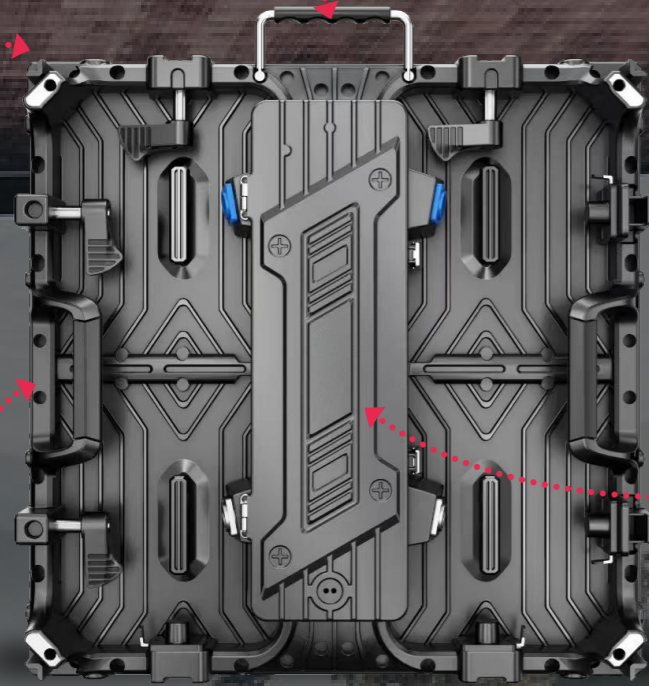

Customizable inner arc housing

High structural strength, Hard to deform.

Power box hard-connect plug-in design

- ◆ Multipitch for 500\*1000mm and 500\*500mm panel
- ◆ Straight/Curved lock with strong strength
- ◆ Hanging, floor stacking and wall mounted
- ◆ Front and rear serviceable  
Corner Protect to protect led from damage

## Support inner



## Interior Curve angle



No wiring, more beautiful; can be quickly disassembled and replaced on site, saving time

Easily cope with repeated disassembly and assembly; Ensure splicing accuracy and flatness

