

# OOHposter

## Outdoor LED Poster



### Specs

Part Number	O-3	O-4	O-5	O-2.97	O-3.91	O-4.81
Pixel Pitch	3.07 mm	4mm	5mm	2.97mm	3.91mm	4.81mm
LED Configuration	SMD1415	SMD1921	SMD2727	SMD1921	SMD1921	SMD1921
Pixel Density	105625 dot/m <sup>2</sup>	62500 dot/m <sup>2</sup>	4000o dot/m <sup>2</sup>	112896 dot/m <sup>2</sup>	65536 dot/m <sup>2</sup>	43264 dot/m <sup>2</sup>
Module Size	320*160mm			250*250mm		
Display Size	940*1580mm and Customized			980*1730mm and Customized		
Cabinet Size	1140*2230mm and Customized			1180*2380mm and Customized		
CabinetWeight	Single side, 215kg/pc; Double side, 285kgs/pc			Single side, 230kg/pc; Double side, 300kgs/pc		
IP Rating (front/back)	IP65/IP65					
Brightness	≥5000 cd/m <sup>2</sup> for copper and 6000 cd/m <sup>2</sup> for gold			≥5000 cd/m <sup>2</sup> for copper and 5800 cd/m <sup>2</sup> for gold		
View Angle	120°/120°					
Max.Power Consumption	670 W/m <sup>2</sup>					
Ave.Power Consumption	200 W/m <sup>2</sup>					
Refresh Frequency	≥1920Hz					
Operating Environment	Outdoor					
Operating Power	AC100-240V 50/60Hz					
Operating Temperature	-20°C ~ +50°C					

### Description

iDisplay OOHposter is designed for outdoor fixed led display application such as bus station, metro station, airport, street poster, gas station, scenic spot, various entrance including resort&casino, museum, bank, store etc. It saves your time and labor cost to change ad of traditional sign and make sure the latest ad and info can reach your customer as soon as possible.

- **Tempered glass protection**
- **Modular design**
- **Customized shape is possible**
- **Great heat dissipation**
- **4G, Wi-Fi or USB Remote control**
- **IP65**
- **Interactive function available**
- **aerospace grade fluorocarbon spray paint**




single side

double side



Shenzhen iDisplay Technology Co.,Ltd.

Add: 3rd Floor,5th Building, FLT industrial park, Longhua, Shenzhen, China  
 Factory: 5th Building, No.6 of Xinhua Avenue, Chengjiang, Zhongkai, Huizhou, China  
 Tel phone: 86-755-85280348  
 E-mail: hello@idisplayled.com  
 www.idisplayled.com

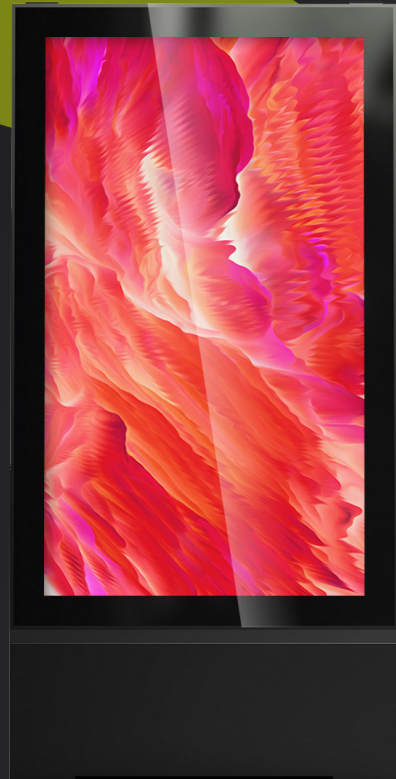

**IP65**



**High Brightness**

5000-7000nits




**High contrast**

7000:1



**Energy Saving**


To saving more than 20% power consumption compare with standard led screen.

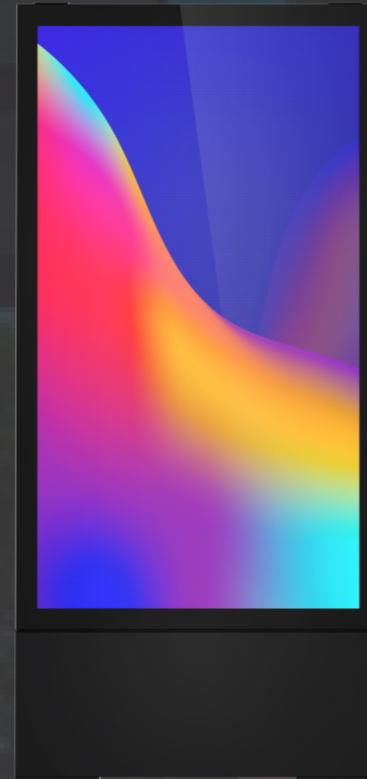

**Modular Design**

T=8mm

**Case study**

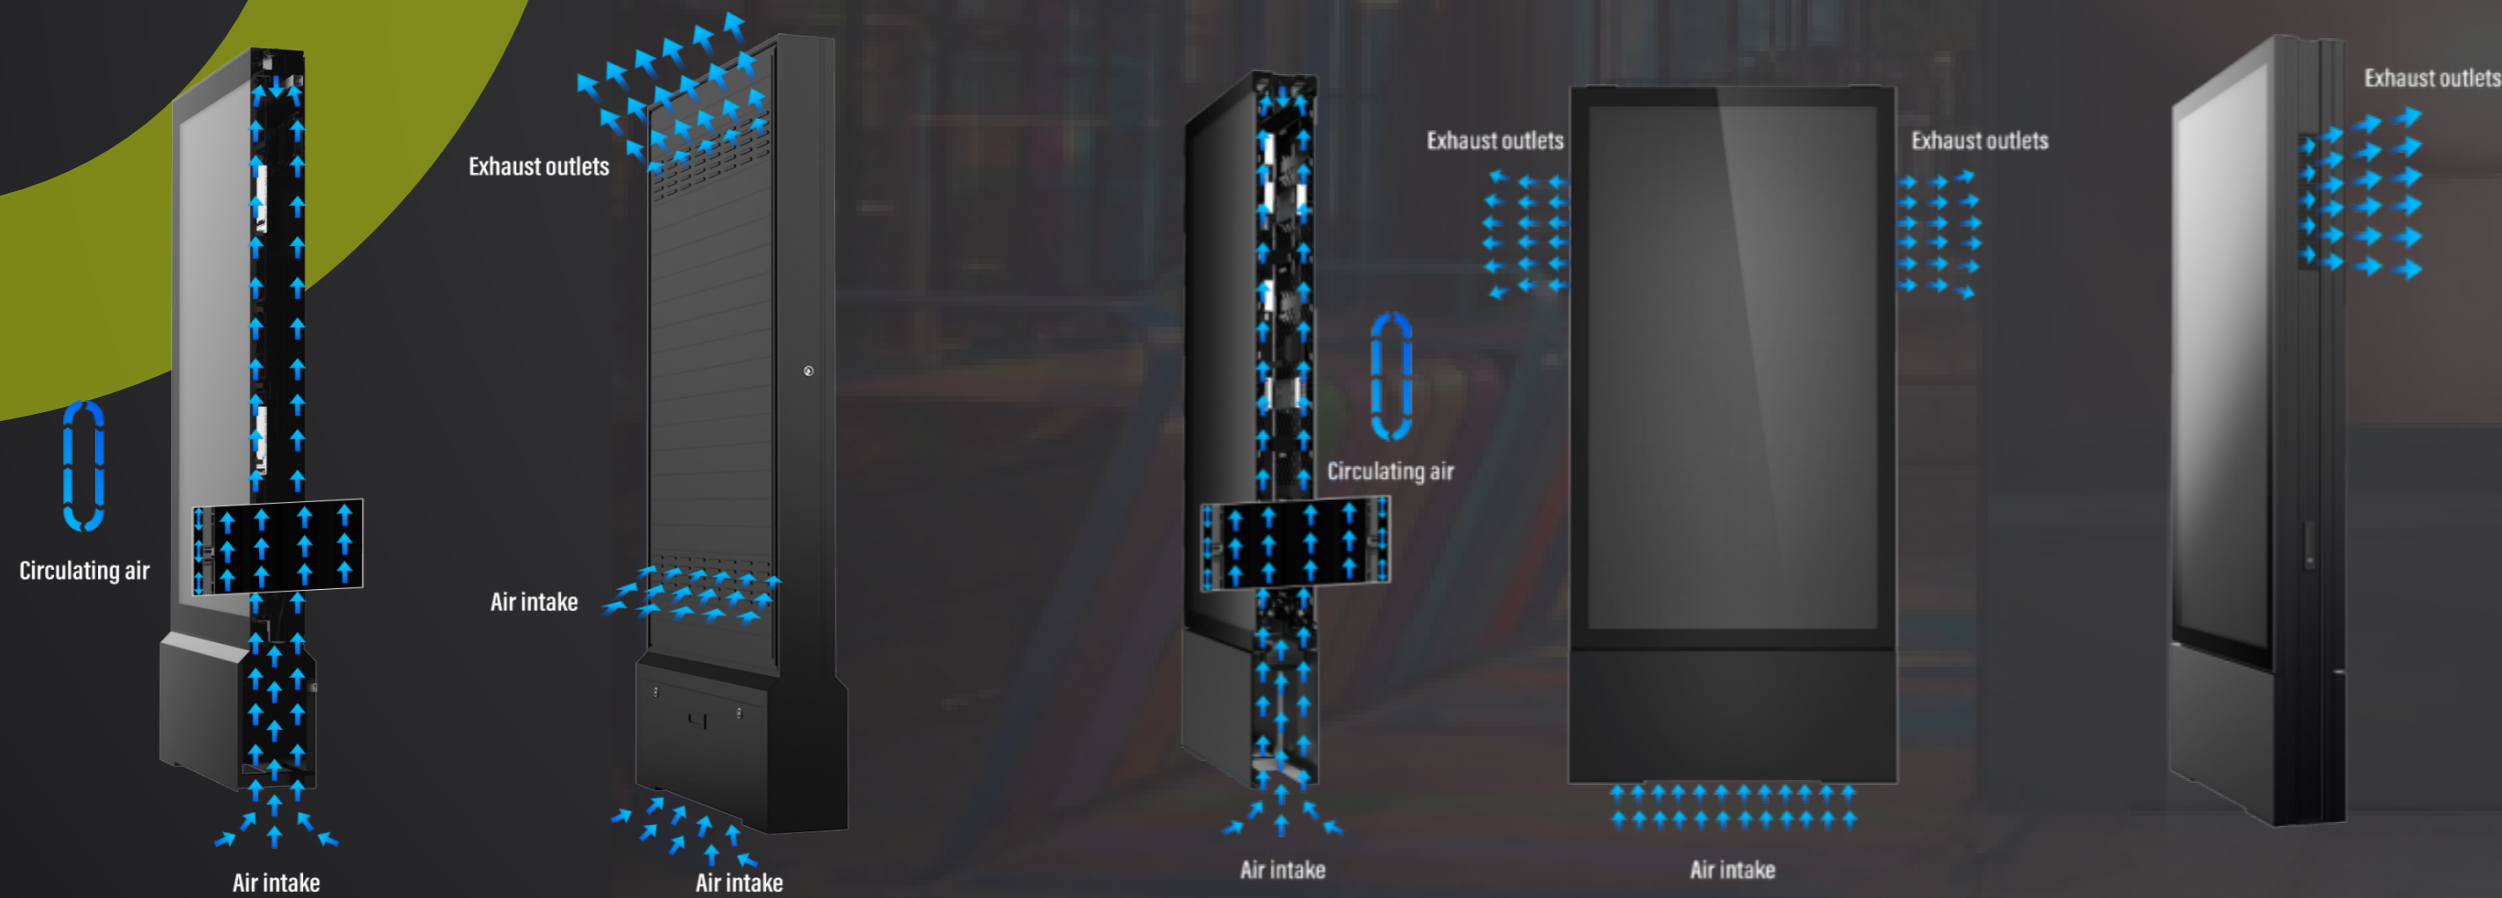

**Heat Dissipation**

