

# SPP


## Stadium Perimeter Panel



### Specs

ITEM	SPP-6	SPP-8	SPP-10
LED	SMD2727	SMD2727	SMD3535
Pixel Pitch (mm)	6.67	8	10
Module Resolution	48x48	40x40	32x32
Module Size (WxH mm)	320x320	320x320	320x320
Module Quantity (WxH)	5x3	5x3	5x3
Cabinet Resolution	240x144	200x120	160x96
Cabinet Size (WxH mm)	1600x960	1600x960	1600x960
Cabinet	Sheet Aluminum	Sheet Aluminum	Sheet Aluminum
Weight (kg/m <sup>2</sup> )	37	37	37
Ingress Protection	IP65/IP54	IP65/IP54	IP65/IP54
Refresh Rate (Hz)	7,680-15,360	7,680-15,360	7,680-15,360
Brightness (nit)	6,000-10,000	6,000-10,000	6,000-10,000
View Angle (H./V.)	120°/ 106°	120°/ 106°	120°/ 106°
Contrast Ratio	8,000:1	9,000:1	10,000:1
Power Consumption (W/m <sup>2</sup> )	600/200	600/200	600/200

### Dimensions

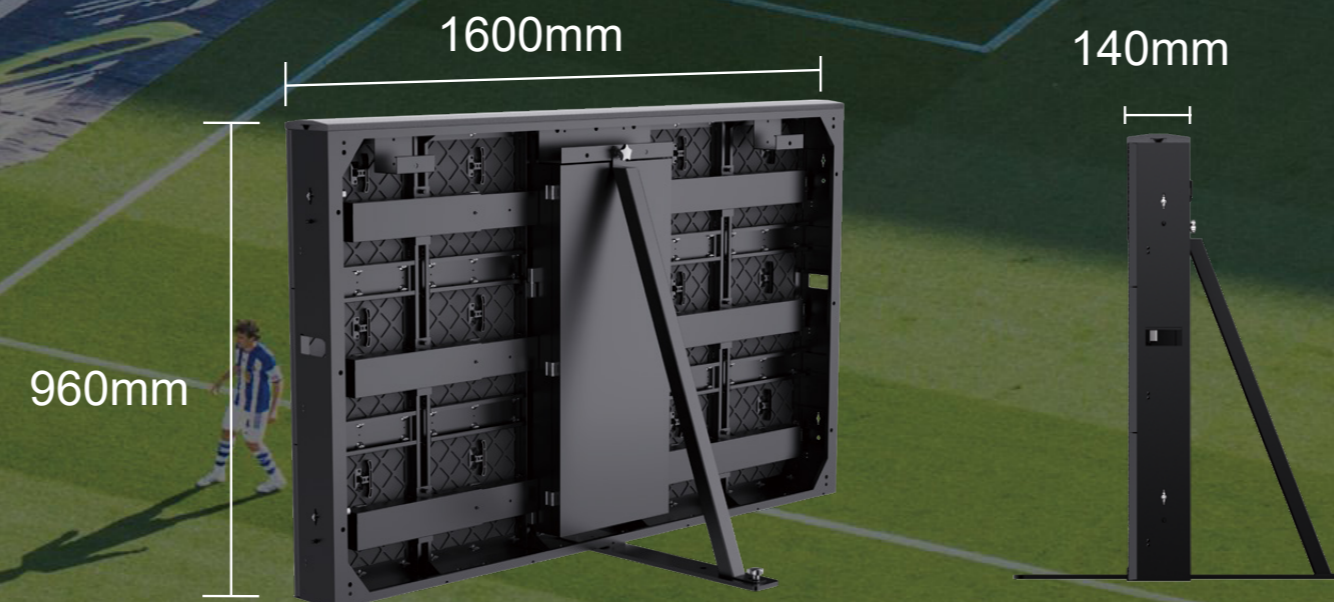

### Ease Box

Super efficient for containing, transportation & warehousing



holding topper, plastic

alignment PE foam

each carries 6 panels (9.6m)

plastic package, foldable

alignment board, plywood

holding bottom, plastic



Shenzhen iDisplay Technology Co.,Ltd.

Add: 3rd Floor,5th Building, FLT industrial park, Longhua, Shenzhen, China  
Factory: 5th Building, No.6 of Xinhua Avenue, Chengjiang, Zhongkai, Huizhou, China  
Tel phone: 86-755-85280348  
E-mail: hello@idisplayled.com  
www.idisplayled.com


## Protective, Robust & Lasting



**Strong Chassis**  
made of high intensity sheet aluminum coated with carbon powder.

### Soft Topper

lessens the impact of any knock to athletes and avoids being injured

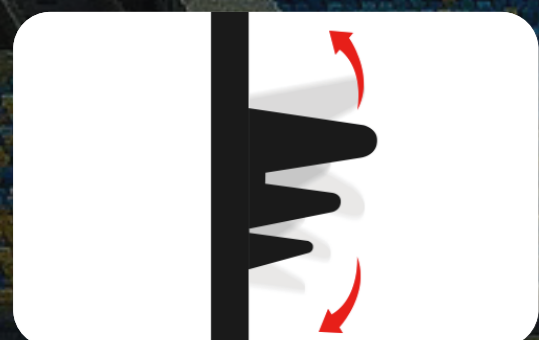

**Soft Module Mask**  
lessens the impact of any knock to athletes and avoids being injured

### IP65 Waterproof

Rated IP65, front & back, the panel repels the harshest of wet conditions.



## High Brightness, High Contrast




max 10,000nit  
max 10,000 : 1

## Big Viewing Angle




45°  
61°


## Rear Maintenance



panel latch




bracket & feet



module latch



for carrying

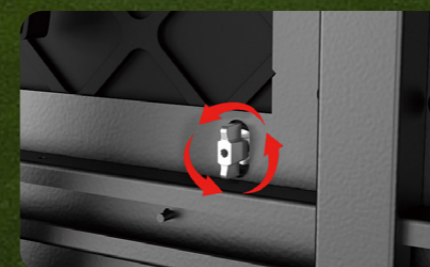

1. 1/4 turn 6 latches



2. pull out the module

