

Videobrick pro

Extremely lightweight | Seamless stitching |
HDR wide color gamut | High refresh rate | Ultra quiet design



High definition
and delicate



High
refresh rate



Front installation
Pre maintenance



express
setup



Dual
backup



Ultra broad
perspective



Silent
operation



High
grayscale


cabinet size

Weight only :
4.5kg

27.5mm

600mm

337.5mm

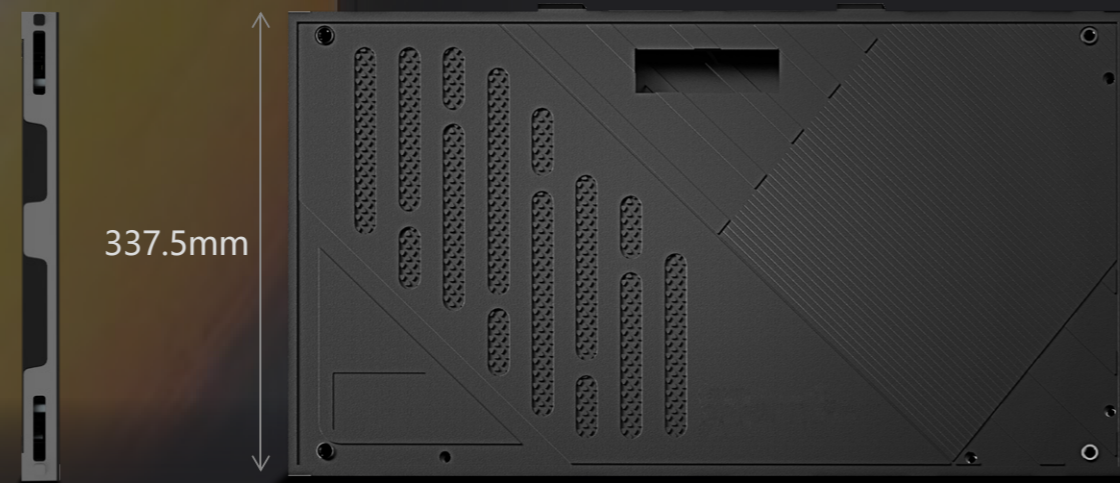


iDISPLAY

Shenzhen iDisplay Technology Co.,Ltd.

Add: 3rd Floor,5th Building, FLT industrial park, Longhua, Shenzhen, China
Factory: 5th Building, No.6 of Xinhua Avenue, Chengjiang, Zhongkai, Huizhou, China
Tel phone: 86-755-85280348
E-mail: hello@idisplayled.com
www.idisplayled.com

Pixel Pitch	P0.78125	P0.9375	P1.25	P1.5625	P1.875
LED type	Mini4 in 1	Mini4 in 1	SMD1010	SMD1010/1212	SMD1010/1515
Pixel density (dots/squaremeter)	1638400	1137778	640000	409600	284444
ModuleResolution	192X216	320X180	240X135	192X108	608X90
Module size (width x height)	150x168.75	300X168.75	300X168.75	300X168.75	300x168.75
Box size(mm)	600x337.5X27.5	600x337.5X27.5	600x337.5X27.5	600x337.5x27.5	600x337.5X27.5
Cabinet resolution	768X512	640x360	480X270	384X216	320x180
Cabinet module composition (width x height)	4x2	2x2	2x2	2x2	2x2
Box weight(kg)	4.5				
maintenance mode	Pre maintenance				
Cabinet material	die-casting aluminum				
Brightness (Nits)	≥600				
Color temperature (K)	1000-18500 adjustable				
Perspective (horizontal\vertical)	170° / 170°				
Brightness/Chroma ticity Uniformity	≥99.8%				
contrast ratio	10000 : 1				
Frame Frequency	50/60				
Driving method	Constant current drive,1/48 sweep				
Gray scale	16bit				
Refresh rate (Hz)	3840				
Maximum power consumption approximately (wm ²)	350				
Average power consumption (w/m ²)	100				
protection grade	IP31				
Power supply requirements	AC90-264V,47-63Hz				
Standards	CCC/CE/RoHS/FCC/CB/TUV/IEC				

2K/4K/8K/16K Large Screen Experience, Enjoy High Definition

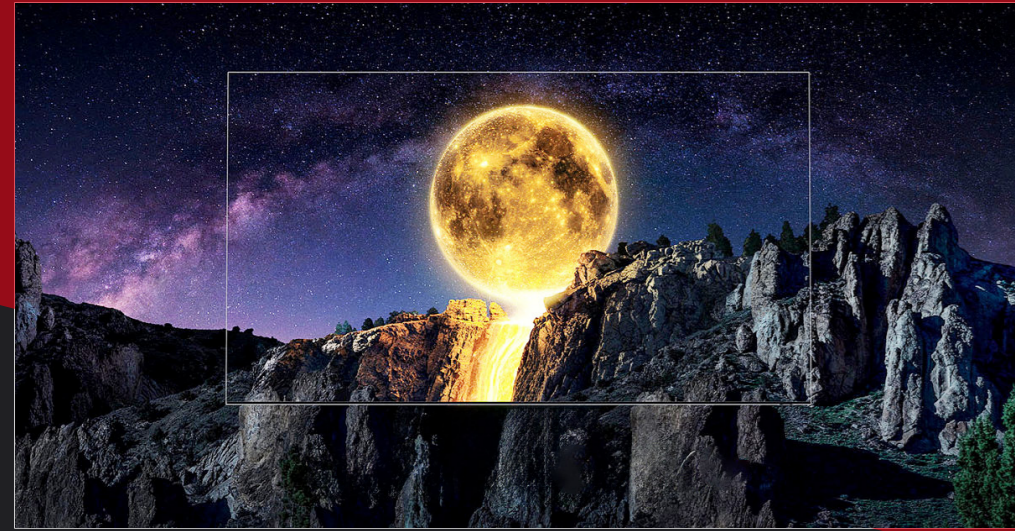



Installation method

- Wall mounted/embedded installation/lifting
- Floor mounted/curved mounted

Wall mounted installation, inlaid installation, lifting, floor mounted installation, curved installation



Case

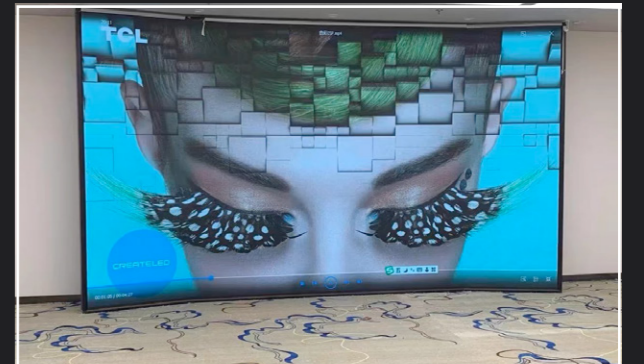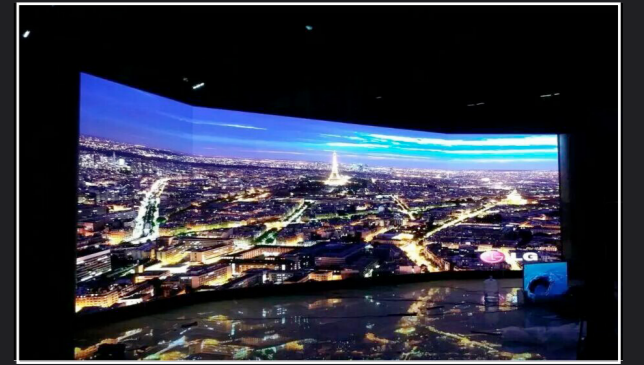


Wide color gamut+HDR

High color coverage, precise reproduction of natural colors, making the picture more realistic. HDR can reproduce the high peak of high dynamic range imaging and display more details;




Seamless splicing


CNC high-precision die-casting aluminum box (Box flatness $\leq 0.1\text{mm}$)
Screwless design for faster and more secure installation
Super silent fanless design

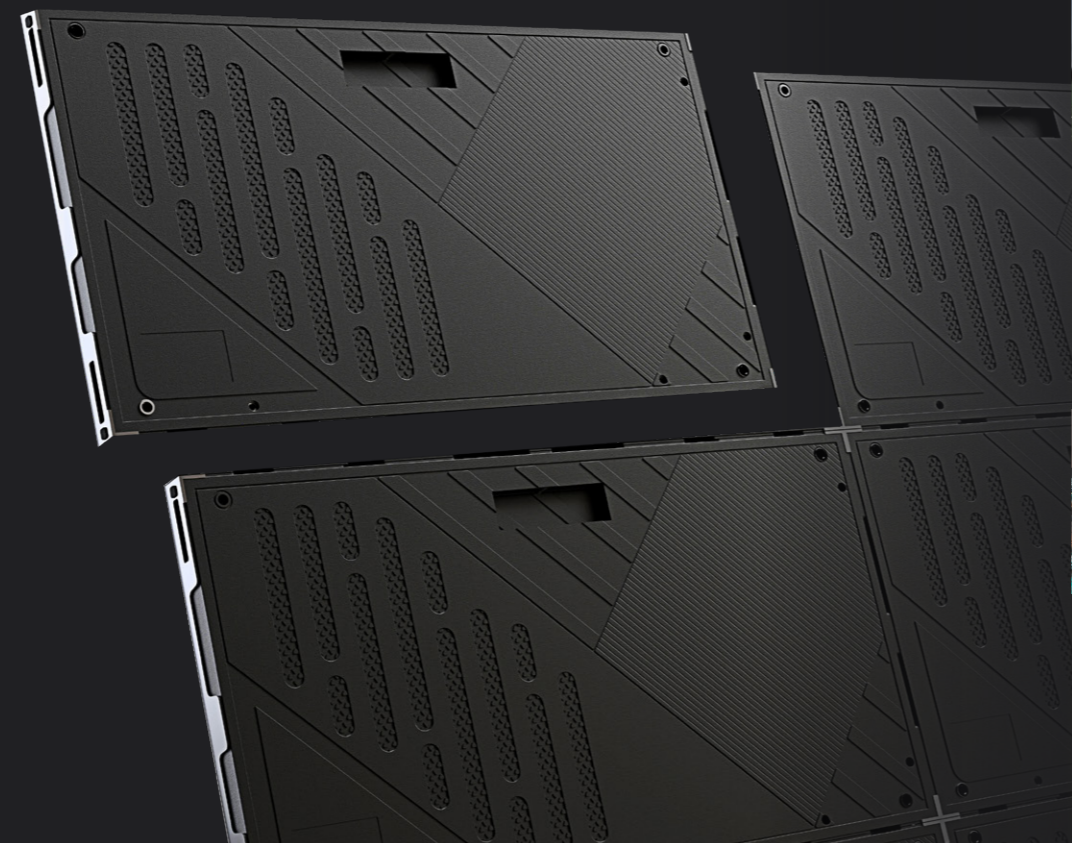

High refresh rate



High refresh rate



Low refresh rate

High grayscale level



High grayscale



Low grayscale