


LuxeLite


Indoor and Outdoor Versatility



Pixel Pitch	1.953	2.6mm	2.97mm	3.91m	4.81m	2.6mm	2.97mm	3.91m	4.81m
LED Configuration	SMD1515	SMD1515	SMD2020	SMD2020	SMD2020	SMD1415	SMD1415	SMD1921	SMD1921
Pixel Density	262144dot/m²	147,456dot/m²	112,896dot/m²	65,536dot/m²	43,223dot/m²	112,896dot/m²	112,896dot/m²	65,536dot/m²	43,223dot/m²
Module size	250*250mm	250*250mm	250*250mm	250*250mm	250*250mm	250*250mm	250*250mm	250*250mm	250*250mm
Module Resolution	128*128	96x96dot	84x84dot	64x64dot	52x52dot	84x84dot	84x84dot	64x64dot	52x52dot
Cabinet Resolution	256x256/512dot	192x192/384dot	168x168/336dot	128x128/256dots	104x104/208dots	168x168/336dot	168x168/336dot	128x128/256dots	104x104/208dots
Cabinet Weight	8kg/12.5kg					9kg/13.5kg			
IP Rating	IP23					IP65			
Environmental	Indoor					outdoor			
Scanning Mode	32s	32s	28s	16s	13s	13s	16s	13s	13s
Brightness	600-700CD/m	700-800CD/m²	700-800CD/m²	700-800CD/m²	700-800CD/m²	4000-4500CD/m²	4000-4500CD/m²	4000-4500CD/m²	4000 4500CD/m²
View Distance	>2	>2.6m	>3m	>4m	>5m	>2.6m	>3m	>4m	>5m
Viewing Angle	140°/140°								
Max.Power Consumption	450W/m²					800W/m²			
Ave.Power Consumption	150W/m²					280W/m²			
RefreshFrequency	3840Hz								
Cabinet Size	500*500mm and 500*1000mm								
Brightness Adjustment	0-100 levels adjustable								
Operation Power	AC100~24050/60Hz								

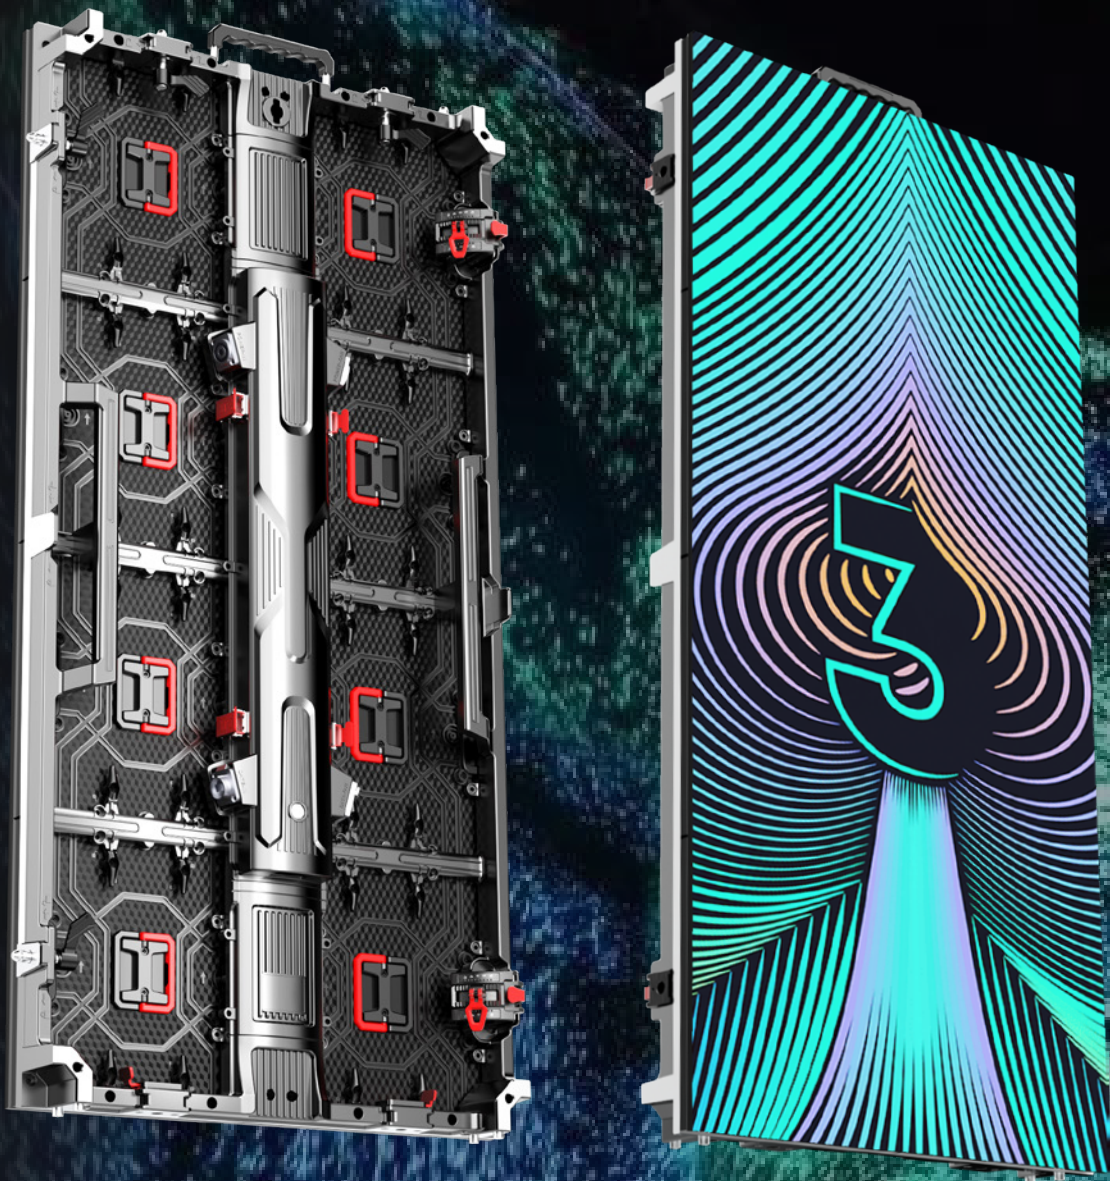

500x500mm

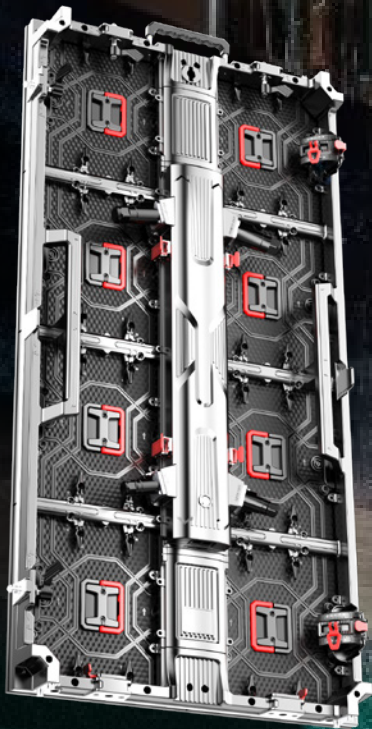

500x1000mm



500 and 1000mm is compatible with each other



Shenzhen iDisplay Technology Co.,Ltd.

Add: 3rd Floor,5th Building, FLT industrial park, Longhua, Shenzhen, China
Factory: 5th Building, No.6 of Xinhua Avenue, Chengjiang, Zhongkai, Huizhou, China
Tel phone: 86-755-85280348
E-mail: hello@idisplayled.com
www.idisplayled.com

Advantages

Single person quick installation and maintenance

High structural strength, Hard to deform.

Module safety lock

Precise angle adjustment lock $-10^{\circ}/-7.5^{\circ}/-5^{\circ}/-2.5^{\circ}$
 $0^{\circ}/2.5^{\circ}/5^{\circ}/7.5^{\circ}/10^{\circ}$

Power box hard-connect plug-in design

Anti-collision corner protector

Smart Fly & Stack Bar

Sideways adjustable rigging clamp assists with truss webbing

Ease Truss

Available for ground stack

Features

- ◆ Multipitch for 500*1000mm and 500*500mm panel
- ◆ Straight/Curved lock with strong strength
- ◆ Hanging, floor stacking and wall mounted
- ◆ Front and rear serviceable
- ◆ Corner Protect to protect led from damage

Concave & Convex

Cubic

Modular & Easy Maintenance

All parts front and rear serviceable.

