




iFlip




Foldable advertising poster

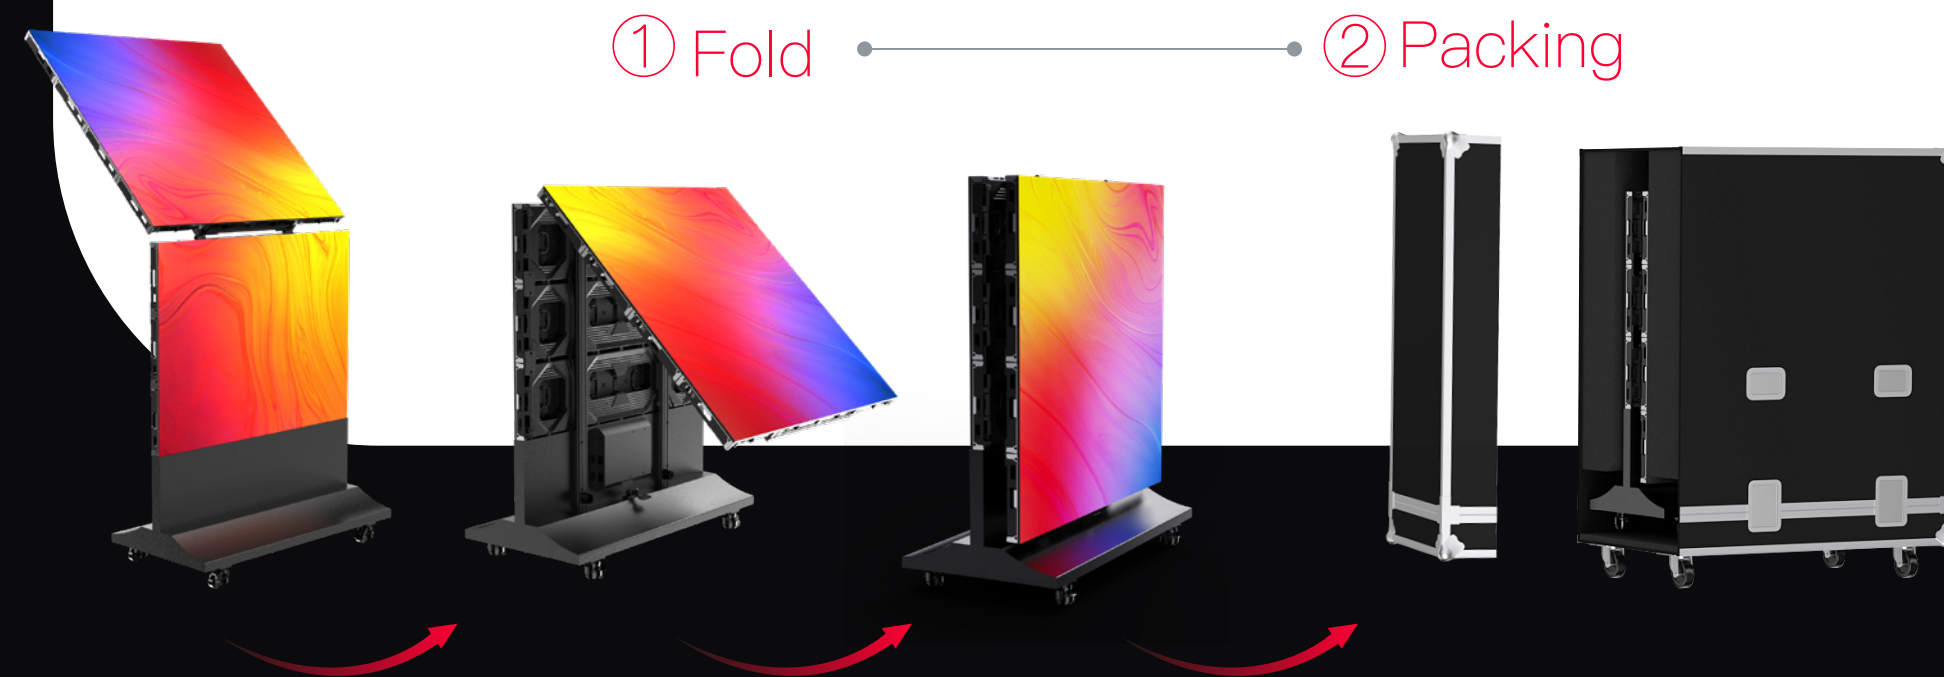

iDISPLAY

Shenzhen iDisplay Technology Co.,Ltd.

Add: 3rd Floor,5th Building, FLT industrial park, Longhua, Shenzhen, China
 Factory: 5th Building, No.6 of Xinhua Avenue, Chengjiang, Zhongkai, Huizhou, China
 Tel phone: 86-755-85280348
 E-mail: hello@idisplayled.com
 www.idisplayled.com

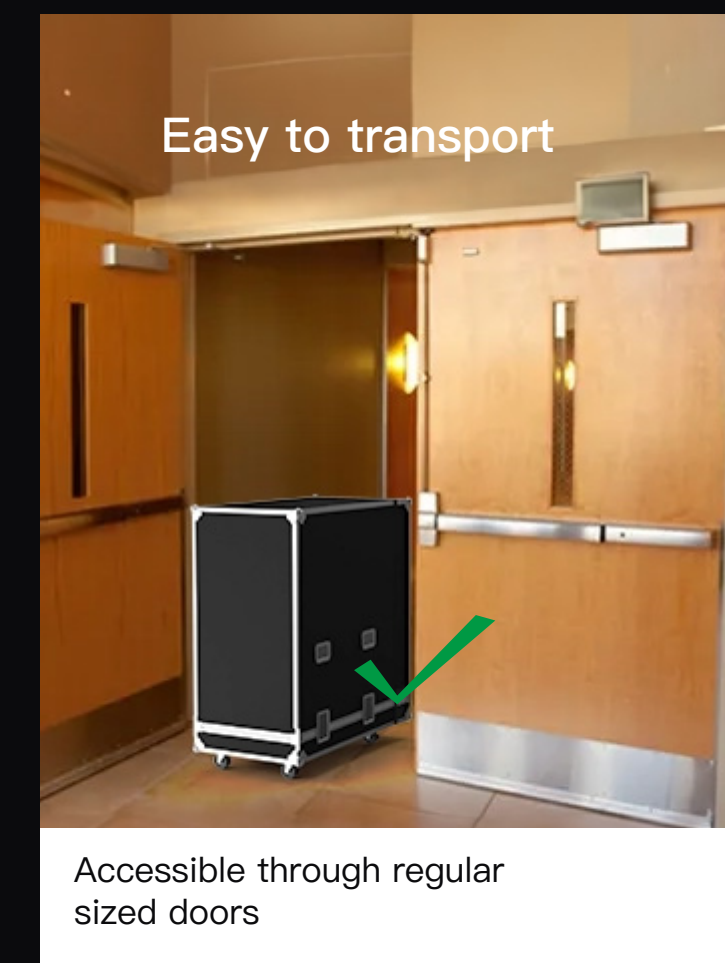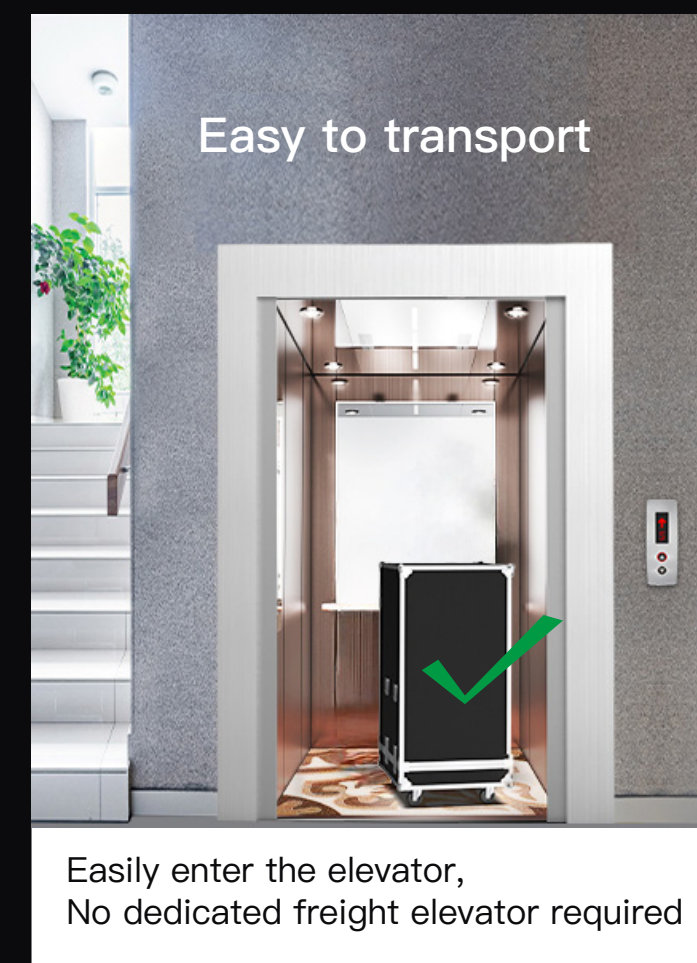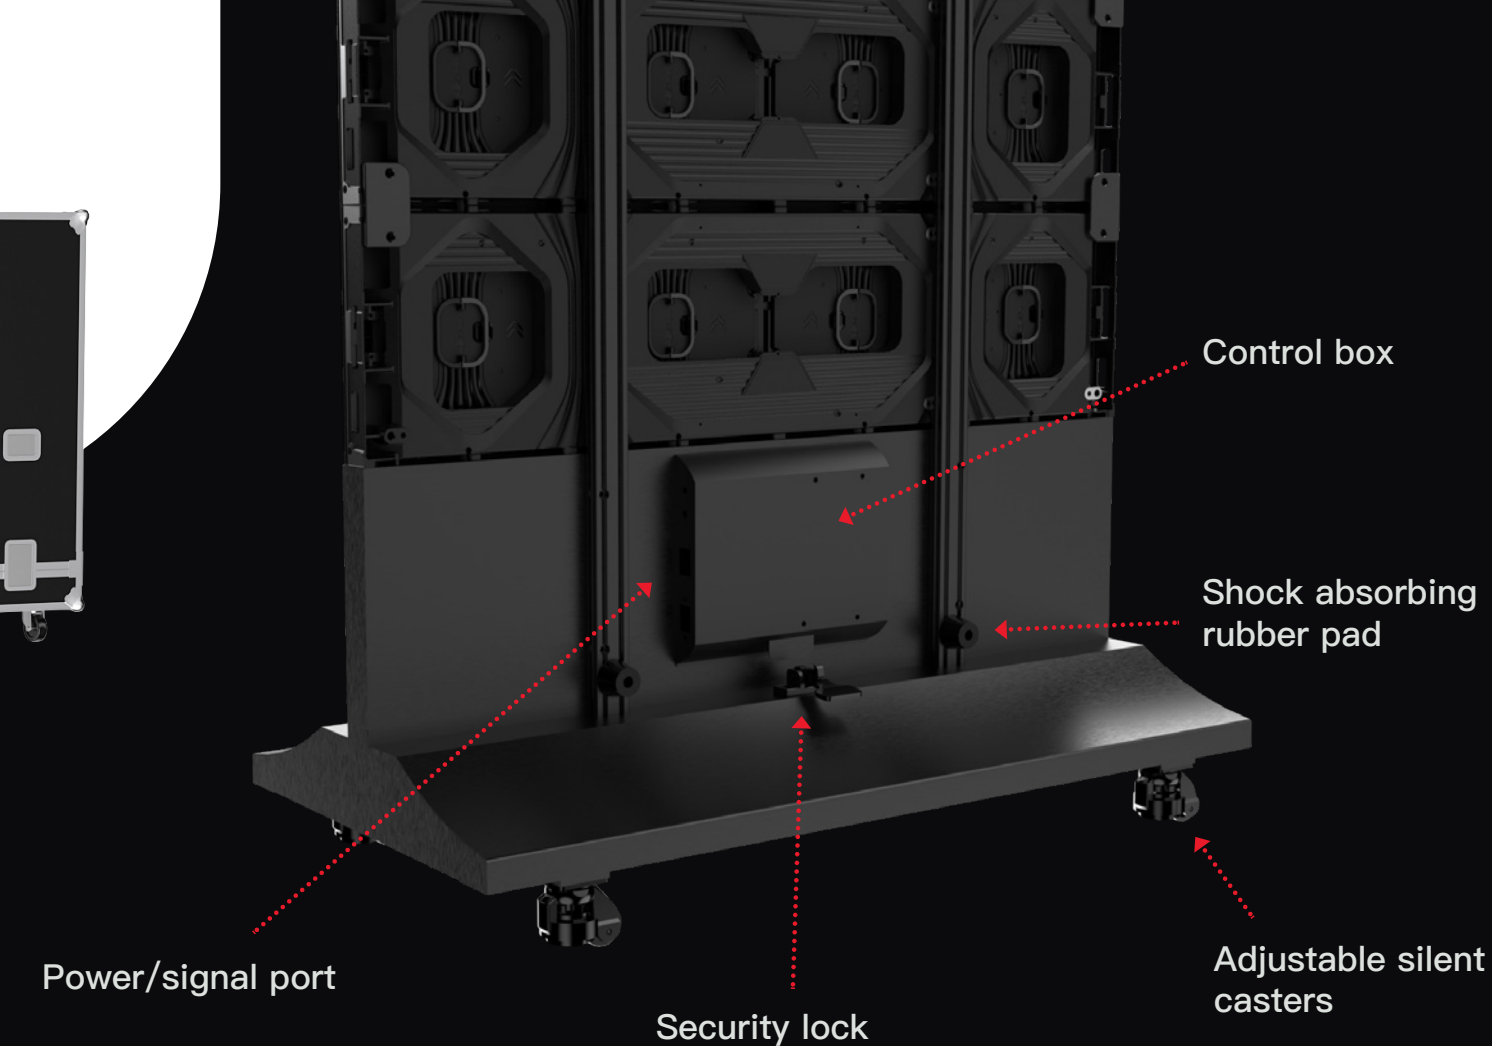

iFlip Specifications				
Pixel Pitch	P1.9	P2.6	P1.9	P2.6
Viewing distance	>1.9m	>2.6m	>1.9m	>2.6m
Module size	250 x 250mm		250 x 250mm	
Module Resolution	132 x 132dots	96 x 96dots	132 x 132dots	96 x 96dots
Cabinet size	(W)1000 x (H)1750mm		(W)1000 x (H)2000mm	
Cabinet Resolution	526 x 920dots	384 x 672dots	526 x 1052dots	384 x 768dots
Weight (kgs)/unit	116		133	
	(combined 3 in 1)		(combined 4 in 1)	
Cabinet size	(W)3000 x (H)1750mm		(W)4000 X (H)2000mm	
Cabinet Resolution	1578 x 920 dots	1154 x 672dots	2104 x 1052dots	1538 x 768dots
Combined Weight (kgs)	348		532	
Scanning Mode	32s			
Power consumption (max./ave.)	550W/m ² / 160W/m ²			
Brightness	indoor 500-800nits, semi outdoor 3000-5000nits			
IP rate	IP20			
Gray scale	14bit			
Refresh rate	1920-3840Hz			
Maintenance method	Front & Rear			
Viewing angle	160°/160			
Display scale	4398Billion			
Environmental	indoor/semi-outdoor			
Operation power	AC100-240V 50/60Hz			
Brightness Adjustment	0-100 levels adjustable			



Airport



School



Training room



Meeting room



Conference room



Hotel



Church



Shopping mall



Interactive application



Dining room



Theater



Random combination and splicing,
seamless display

Scenario application:

School, church, museum, hotel, restaurant, theater shopping mall, airport, train station,
training room, conference room, showroom, bank, telecommunications hall, etc.