




Pixel Pitch	1.953	2.6mm	2.97mm	3.91m	4.81m	2.97mm	3.91m	4.81m	5.95m
LED Configuration	SMD1515	SMD1515	SMD2020	SMD2020	SMD2020	SMD1415	SMD1921	SMD1921	SMD3535
Pixel Density	262144dot/m²	147,456dot/m²	112,896dot/m²	65,536dot/m²	43,223dot/m²	112,896dot/m²	65,536dot/m²	43,223dot/m²	28224dot/m²
Module size	250*250mm								
Module Resolution	128*128	96x96dot	84x84dot	64x64dot	52x52dot	84x84dot	64x64dot	52x52dot	42*42dot
Cabinet Size	500*500mm and 500*1000mm								
Cabinet Resolution	256x256/512dot	192x192/384dot	168x168/336dot	128x128/256dots	104x104/208dots	168x168/336dot	128x128/256dots	104x104/208dots	84x84/168dots
Cabinet Weight	8kg/12.5kg					9kg/13.5			
IPRating (front/back)	IP23					IP65			
Scanning Mode	32s	32s	28s	16s	13s	21s	16s	13s	7s
Brightness	600-700CD/m	700-800CD/m²	700-800CD/m²	700-800CD/m²	700-800CD/m²	4000-4500CD/m²	4000-4500CD/m²	4000-4500CD/m²	5000-5500CD/m²
Viewing Angle		140° /140°							
View Distance	>2	>2.6m	>2.9m	>4m	>5m	>2.9m	>4m	>5m	>6m
Max.Power Consumption	450W/m²					800W/m²			
Ave.Power Consumption	150W/m²					280W/m²			
Refresh Frequency	3840Hz								
Environmental	Indoor					outdoor			
Brightness Adjustment	0-100 levelsadjustable								
Operation Power	AC100~240 50/60Hz								

Glovision

iDISPLAY

Shenzhen iDisplay Technology Co.,Ltd.

Add: 3rd Floor,5th Building, FLT industrial park, Longhua, Shenzhen, China
Factory: 5th Building, No.6 of Xinhua Avenue, Chengjiang, Zhongkai, Huizhou, China
Tel phone: 86-755-85280348
E-mail: hello@idisplayled.com
www.idisplayled.com





500x500mm



500x1000mm

Smart Fly & Stack Bar

Sideways adjustable rigging clamp assists with truss webbing

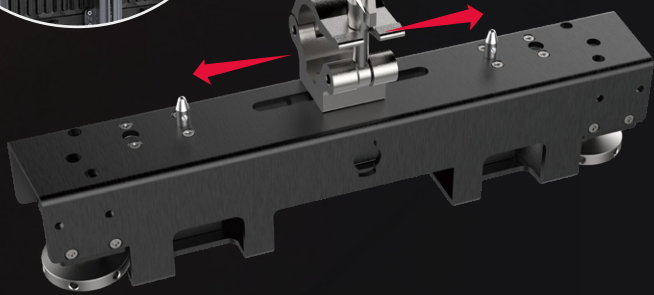

Ease Truss

Available for ground stack



Advantages

Single person quick installation and maintenance

Anti-collision corner protector

Customizable inner arc housing

High structural strength, Hard to deform.

Opening this door provides access to the power supply unit, receiving card and cables.

Compatibility

Support mix assembly of 500*500mm and 500*1000mm panel, it gives a freedom for screen dimension and irregular shape.

Durability

Easily cope with repeated disassembly and assembly; Ensure splicing accuracy and flatness

Features

Multi-pitch for 500*1000mm and 500*500mm panel

Straight/Curved lock with strong strength

Hanging, floor stacking and wall mounted

Front and rear serviceable

Corner Protect to protect led from damage

Concave



Convex



Case Study

