





iFlip


Foldable advertising poster

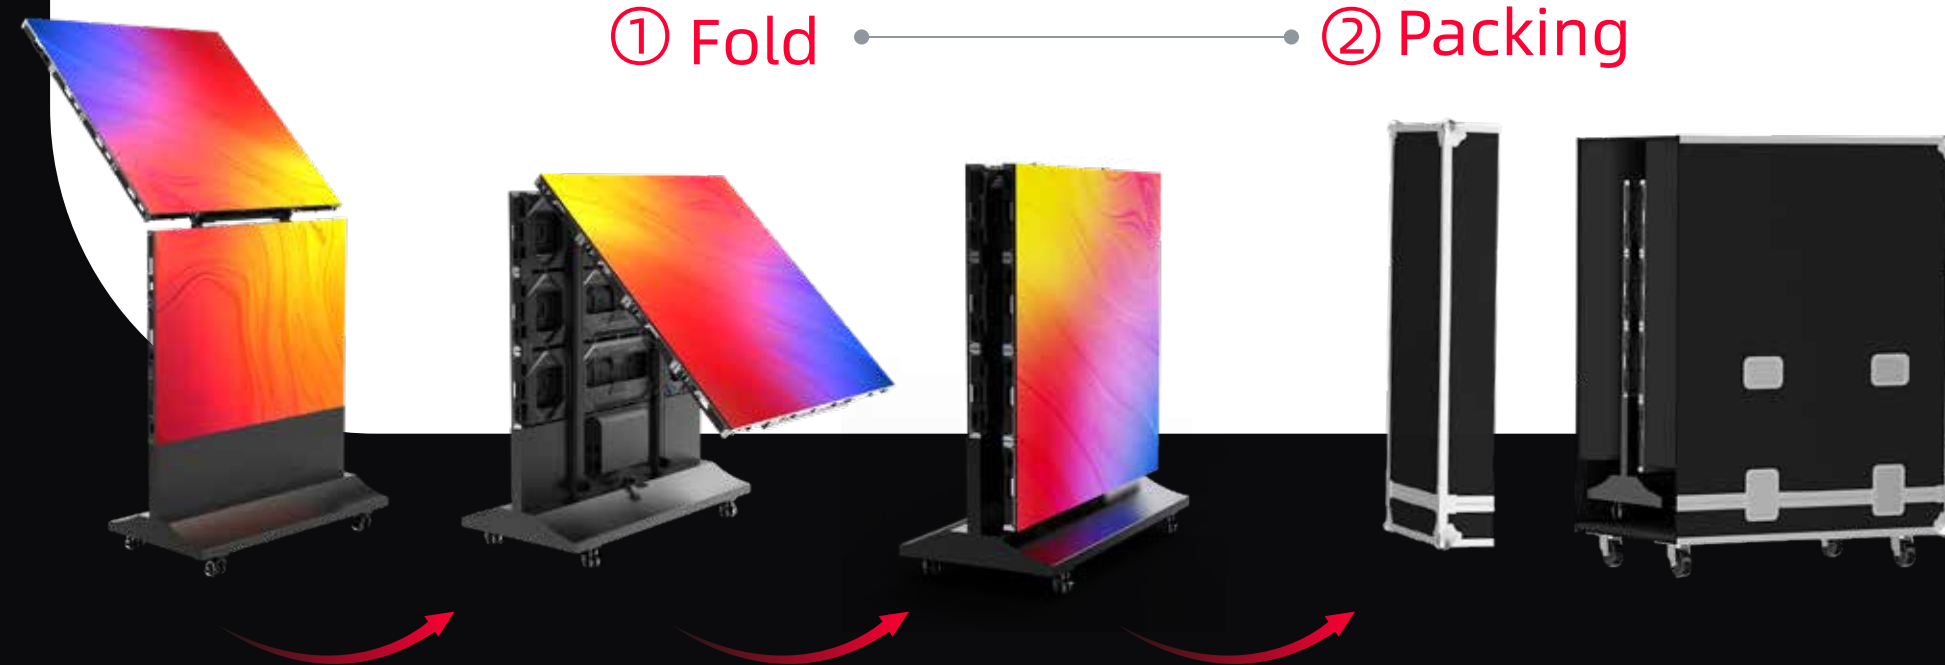


iFlip is a versatile LED standee with seamless assembly for smooth displays and a foldable design that fits into a flight case, ensuring easy transport in cars and buildings. It is ideal for various applications including hotels, training rooms, auditoriums, churches, schools and transport hubs.

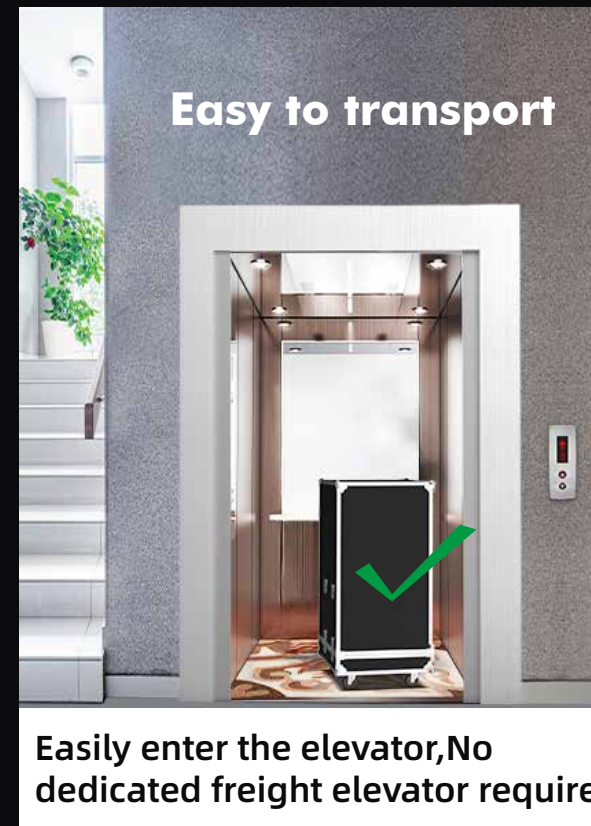

Easy to transport
Easily enter the elevator, No dedicated freight elevator required

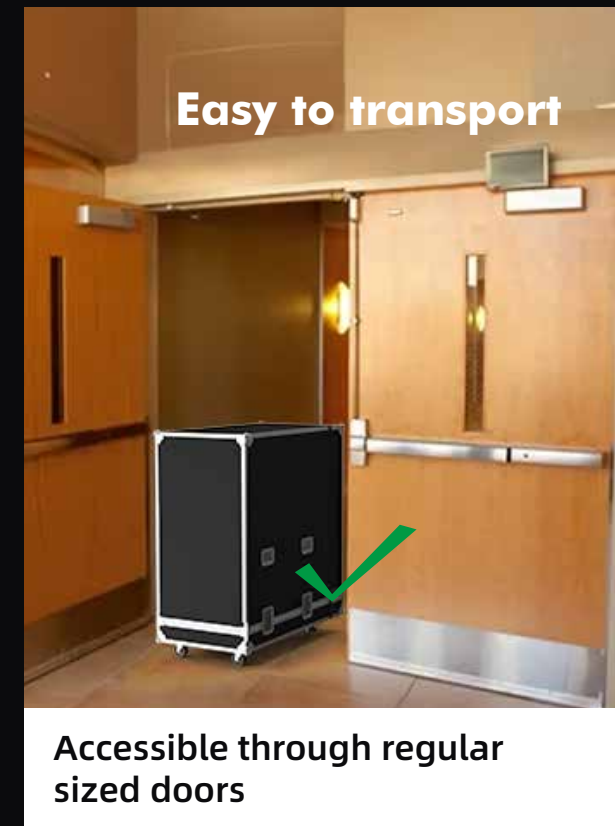

Easy to transport
Accessible through regular sized doors

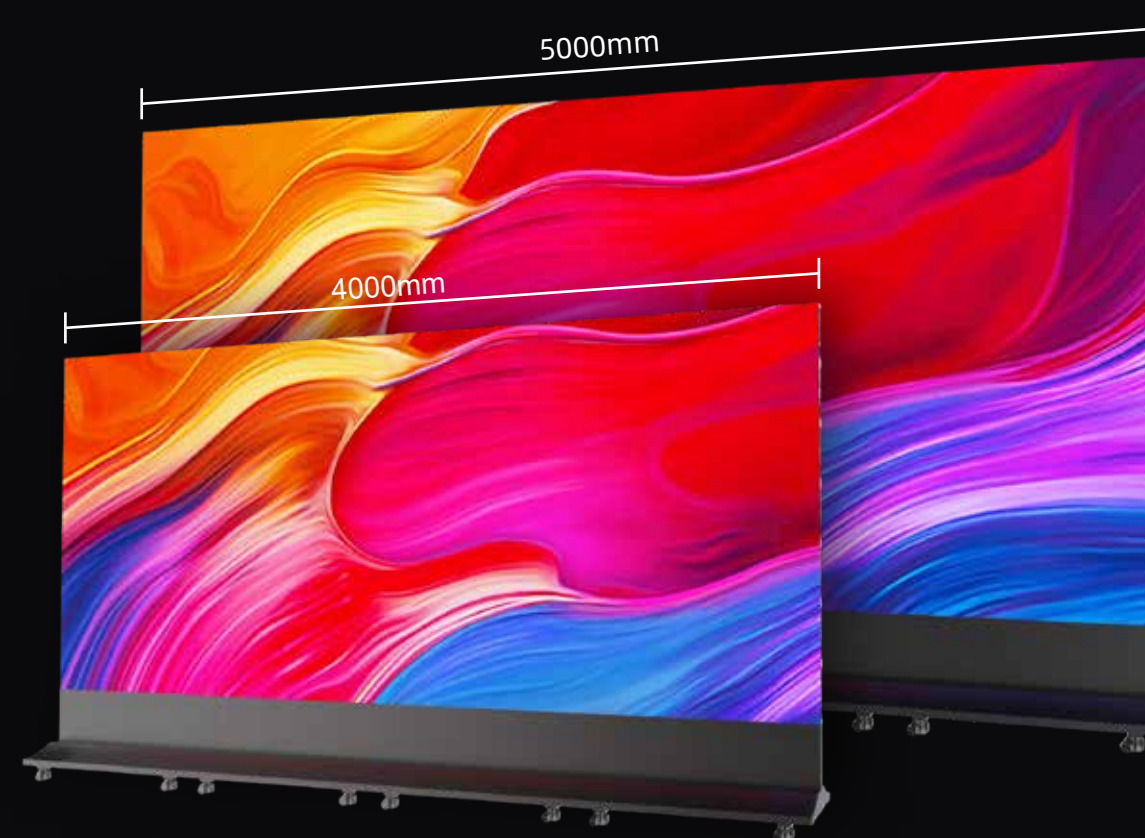

Random combination and splicing,
seamless display



Double-sided
corner splicing

iFlip can form double-sided corner screens, which can achieve fast 90-degree and more than 90 degree seamless splicing, provide flexible configuration and dynamic viewing angle, and enhance visual impact.

iD ISPLAY

Shenzhen iDisplay Technology Co.,Ltd.

Add: 3rd Floor, 5th Building, FLT industrial park, Longhua, Shenzhen, China
Factory: 5th Building, No.6 of Xinhua Avenue, Chengjiang, Zhongkai, Huizhou, China
Tel phone: 86-755-85280348
E-mail: hello@idisplayled.com
www.idisplayled.com


iFlip Specifications						
Pixel Pitch	P1.9	P2.6	P1.9	P2.6	P1.9	P2.6
Viewing distance	>1.9m	>2.6m	>1.9m	>2.6m	>1.9m	>2.6m
Module size	250x250mm		250x250mm		250x250mm	
Module Resolution	128 x 128dots	96 x 96dots	128 x 128dots	96 x 96dots	128 x 128dots	96 x 96dots
Cabinet size	(W)1000 x (H)1750mm		(W)1000 x (H)2000mm		(W)1000 x (H)2500mm	
Cabinet Resolution	512*896dots	384 x 672dots	512*1024dots	384 x 768dots	512*1280dots	384x 960dots
Weight (kgs)/unit	116		133		166	
Max Splicing Units	4 units	5 units	4 units	5 units	4 units	5 units
Display size (W)*(H)	4000*1750mm	5000*1750mm	4000*2000mm	5000*2000mm	4000*2500mm	5000*2500mm
Display Resolution	2048*896dots	1920*672dots	2048*1024dots	1920*768dots	2048*1280dots	1920*960dots
Combined Weight (kgs)	464	580	532	665	664	830
Scanning Mode	32s					
Power consumption (max./ave.)	550W/m² / 160W/m² for indoor; 750W/m² / 230W/m² for semi-outdoor					
Brightness	indoor 500-800nits, semi outdoor 3000-5000nits					
IP rate	IP20					
Gray scale	14bit					
Refresh rate	1920-3840Hz					
Maintenance method	Front & Rear					
Viewing angle	160°/160					
Display scale	4398Billion					
Environmental	indoor/semi-outdoor					
Operation power	AC100-240V 50/60Hz					
Brightness Adjustment	0-100 levels adjustable					



iFlip P1.9 supports up to 4 units for splicing.



iFlip P2.6 supports up to 5 units for splicing.

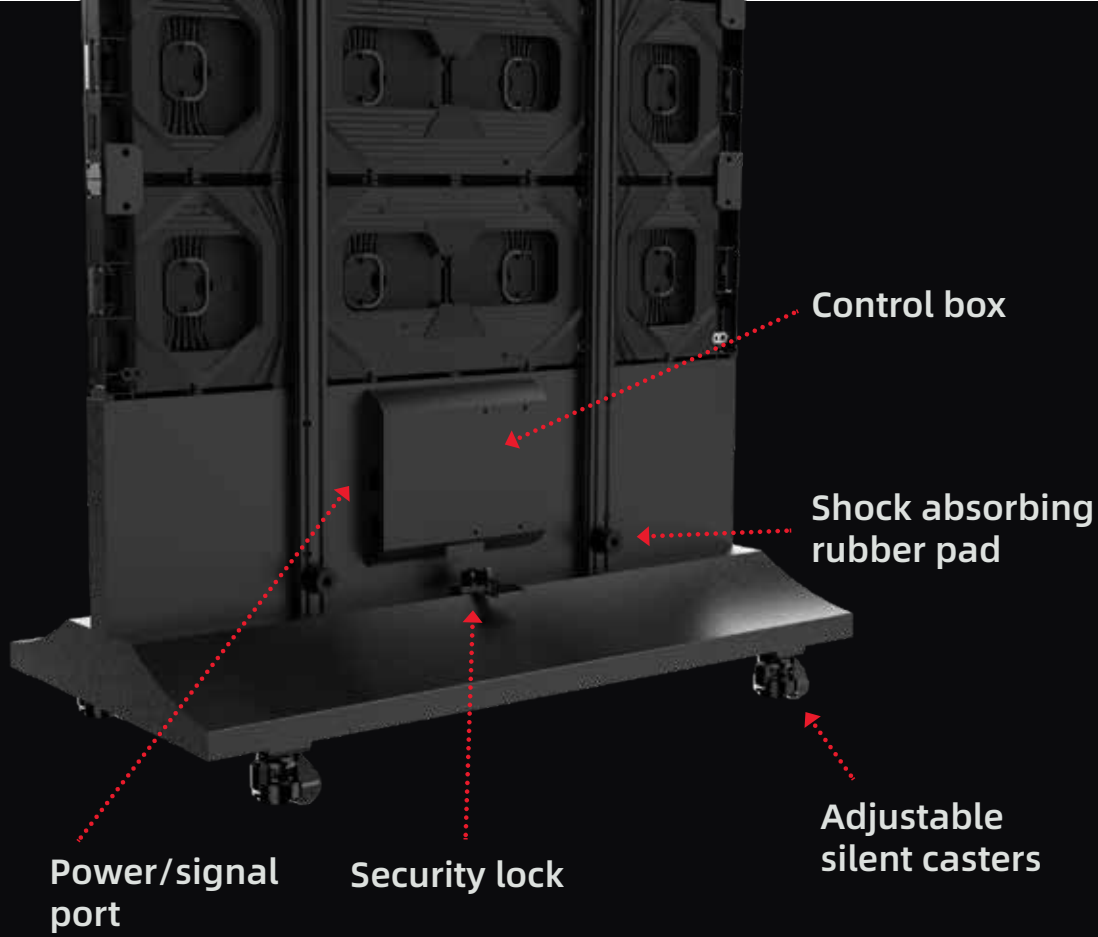

Foldable, achieve double-sided playback!



Scenario application:

School, church, museum, hotel, resturant, theater , shopping mall, airport, train station, training room, conference room, showroom, bank, telecommunications hall, etc.



School



Training room



Meeting room



Hotel



Church



Airport



Shopping mall



Interactive application



Dining room