

iPoster lite

Indoor Poster LED Screen



USB



APP+WiFi/4G



PC+WiFi/4G/
Ethernet



LAN1000M

USB1

USB2

HDMI IN

HDMI OUT

AUDIO

RST

PWR

SYS

LOUD

RUN

SDH ATM SW

POWER SWITCH

AC100-240V
POWER

59mm

640mm

1920mm

1992mm

420mm

Item	P1.8	P2	P2.5
Pixel composition	1R1G1B (SMD1515)	1R1G1B (SMD1515)	1R1G1B (SMD2020)
Pixel pitch	1.8mm	2mm	2.5mm
Module resolution	172*86	160*80	128*64
Module size	320*160mm	320*160mm	320*160mm
Display resolution	516*860	480*800	384*640
Display size (mm)	640*1920	640*1920	640*1920
iPoster size(mm)	640*1992	640*1992	640*1992
Scan rate	1/43 Scan	1/40 Scan	1/32 Scan
Powerconsumption (Max.1Ave.)	Max. 700W/pc,Ave.210W/pc		
Maximum white balance brightness	800nits		
IP rate	IP30		
The most slim and thick part of panel	38/80mm		
Screen weight	106kg/pc		
Viewing angle	V ≥140°/ H ≥140°		
Refresh rate	≥3840Hz		
Control method	4G, Wi-Fi, USB		
Signal Source	HDMI, SDI, S-Video, MP4		
Longevity	≥80,000H.		
Continuous working time	72hours		
Environmental temperature and humidity	T: -20℃~+45℃, H: 10%~60%		
Operating Voltage	AC 240/100±10%, 50Hz/60Hz		



Shenzhen iDisplay Technology Co.,Ltd.

Add: 3rd Floor,5th Building, FLT industrial park, Longhua, Shenzhen, China

Factory: 5th Building, No.6 of Xinhua Avenue, Chengjiang, Zhongkai, Huizhou, China

Tel phone: 86-755-85280348

E-mail: hello@idisplayled.com


www.idisplayled.com



Displaying mode

Seamless splice, 6pc iPoster resolution ratio is 16:9

High Brightness
800nits



High contrast
5000:1



High Refresh Rate
3840 Hz



Accessories



Receiving card



Ribbon cable



Hub card



LED Module




Asyn Sending card



AC plug

Package

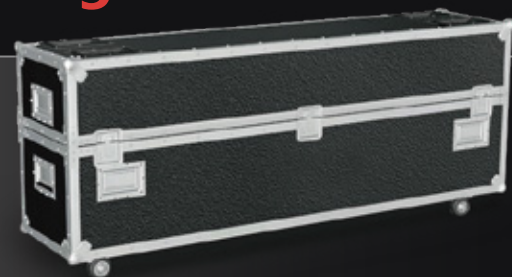

Flight case

1 in 1 , 2 in 1 , 4 in1 are available



Nylon bag + Plywood case

1 iPoster in one Nylon bag
4 iPoster in one plywood case

