

iPoster pro









Indoor Poster LED Screen



Shenzhen iDisplay Technology Co.,Ltd.


Add: 3rd Floor,5th Building, FLT industrial park, Longhua, Shenzhen, China
Factory: 5th Building, No.6 of Xinhua Avenue, Chengjiang, Zhongkai, Huizhou, China
Tel phone: 86-755-85280348
E-mail: hello@idisplayled.com
www.idisplayled.com



-   USB
-   APP+WiFi/4G
-   HDMI
-   PC+WiFi/4G/
Ethernet




Description

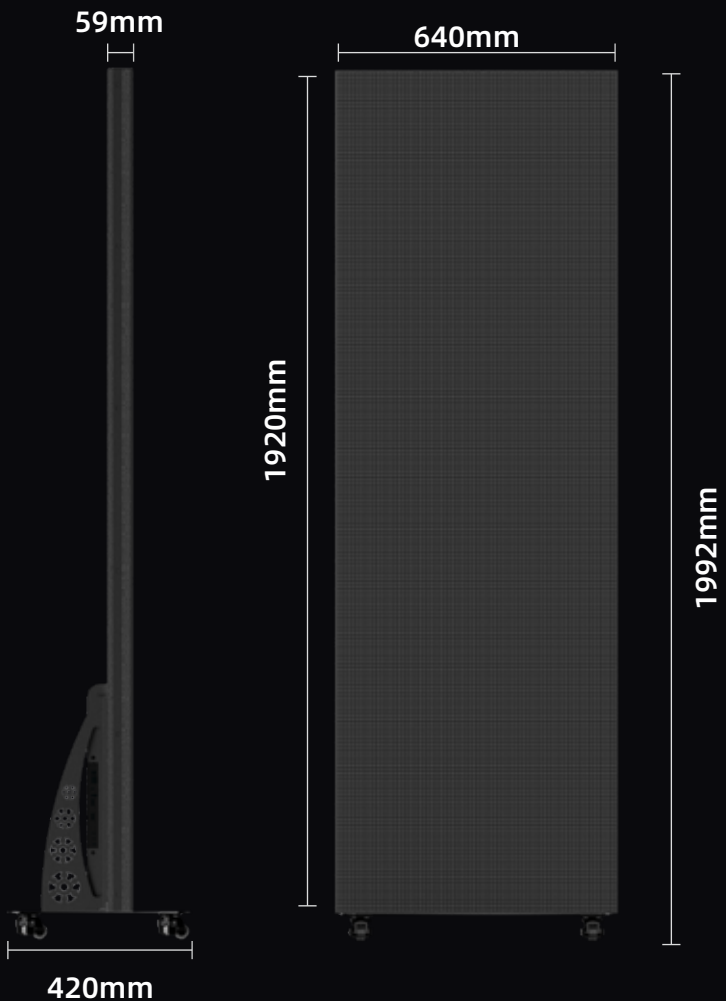iPoster pro is a more advanced indoor moveable digital signage as it is high brightness, high contrast and high refresh rate which is capable to assemble several poster together seamlessly to form into a bigger video wall.



Foldable frame design, seamless splicing of multiple screens

Adopt the latest foldable independent edge wrapping and seamless splicing of multiple screens to meet the application needs of more scenarios.

-  1. Open the side cover
-  2. Align with the fixing hole
-  3. Use a hexagonal wrench to tighten the internal hook lock to complete the seamless splicing


Item	P1.8	P2	P2.5
Pixel composition	1R1G1B (SMD1515)	1R1G1B (SMD1515)	1R1G1B (SMD2020)
Pixel pitch	1.8mm	2mm	2.5mm
Module resolution	172*86	160*80	128*64
Module size	320*160mm	320*160mm	320*160mm
Display size (mm)	640*1920	640*1920	640*1920
Scan rate	1/43 Scan	1/40 Scan	1/32 Scan
Powerconsumption (Max.1Ave.)		Max. 700W/pc,Ave.210W/pc	
Maximum white balance brightness		800nits	
IP rate		IP30	
The most slim and thick part of panel		38/80mm	
Screen weight		52kg/pc	
Viewing angle		V ≥140°/ H ≥140°	
Refresh rate		≥3840Hz	
Control method		4G, Wi-Fi, USB	
Signal Source		HDMI, SDI, S-Video, MP4	
Longevity		≥80,000H.	
Continuous working time		72hours	
Operating Voltage		AC 240/100±10%, 50Hz/60Hz	



Seamless Splicing

The 6-piece iPoster boasts an impressive 16:9 resolution ratio, ensuring a flawless and cohesive display

High Brightness
800nits



High Contrast
5000:1



High Refresh Rate
3840 Hz



Supports two floor-standing installation modes



Leaning

Upright

Accessories



Ribbon cable



Receiving card



AC plug



Asyn Sending card



LED Module

Package



Flight case
1 in 1 , 2 in 1 , 4 in1 are available



Nylon bag + Plywood case
1 iPoster in one Nylon bag
4 iPoster in one plywood case

