


# iPoster

## Indoor Poster LED Screen




Magnetic frame with foldable edges allows quick LED poster splicing without border removal.

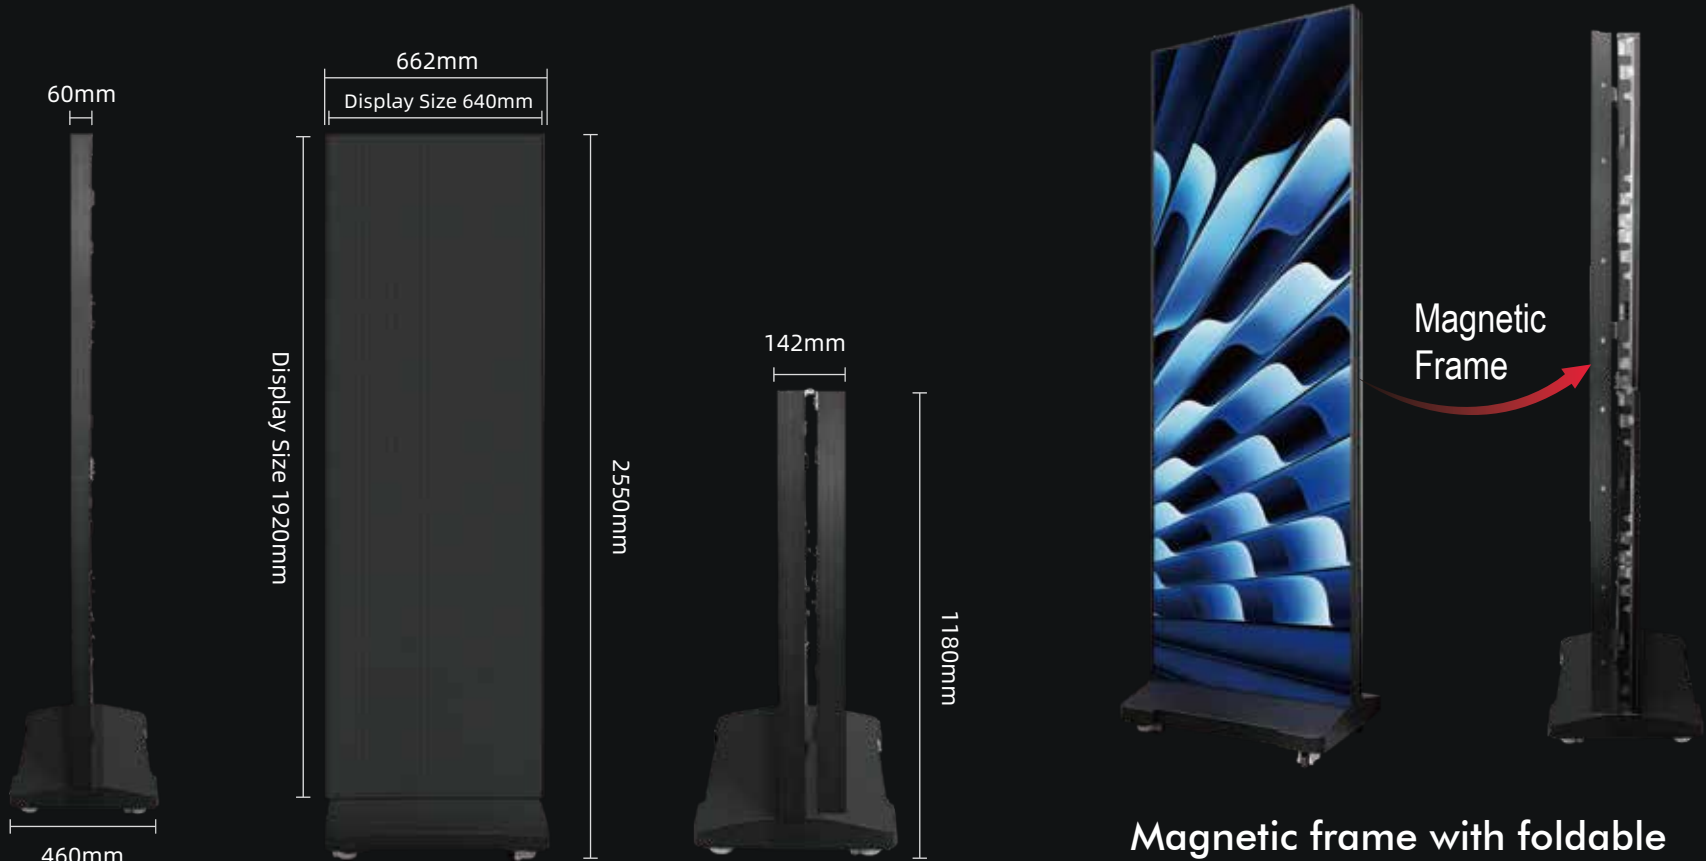

### Seamless Splicing

The 5-piece iPoster boasts an impressive 16:9 resolution ratio, ensuring a flawless and cohesive display

High Brightness  
800nits



High Contrast  
5000:1



High Refresh Rate  
3840 Hz



### Specifications

| Item                                   | P1.25                        | P1.5         | P1.8         | P2           | P2.5         |
|----------------------------------------|------------------------------|--------------|--------------|--------------|--------------|
| Pixel Composition                      | 1R1G1B                       | 1R1G1B       | 1R1G1B       | 1R1G1B       | 1R1G1B       |
| Pixel Pitch                            | 1.25 mm                      | 1.5 mm       | 1.8 mm       | 2 mm         | 2.5 mm       |
| Module Resolution                      | 256 × 128                    | 208 × 104    | 172 × 86     | 160 × 80     | 128 × 64     |
| Module Size                            | 320 × 160 mm                 | 320 × 160 mm | 320 × 160 mm | 320 × 160 mm | 320 × 160 mm |
| Display Resolution                     | 512 × 1536                   | 416 × 1248   | 384*1032     | 320*960      | 256*768      |
| Display Size (mm)                      | 640*1920                     | 640*1920     | 640*1920     | 640*1920     | 640*1920     |
| iPoster Size (mm)                      | 662*2550                     | 662 × 2550   | 662*2550     | 662*2550     | 662*2450     |
| Scan Rate                              | 1/64 Scan                    | 1/54 Scan    | 1/43 Scan    | 1/40 Scan    | 1/32 Scan    |
| Power Consumption (Max / Ave)          | Max. 700W/pc, Ave. 210W/pc   |              |              |              |              |
| Maximum White Balance Brightness       | 600-800 nits                 |              |              |              |              |
| IP Rating                              | IP30                         |              |              |              |              |
| The most slim part                     | 60 mm                        |              |              |              |              |
| Screen Weight                          | 44.1 kg                      |              |              |              |              |
| Viewing Angle                          | V ≥140° / H ≥140°            |              |              |              |              |
| Refresh Rate                           | ≥3840 Hz                     |              |              |              |              |
| Control Method                         | 4G, Wi-Fi, USB               |              |              |              |              |
| Signal Source                          | HDMI, SDI, S-Video, MP4      |              |              |              |              |
| Longevity                              | ≥80,000 H                    |              |              |              |              |
| Continuous Working Time                | 100hours                     |              |              |              |              |
| Environmental temperature and humidity | T: -10°C ~ +45°C, H: 10%~60% |              |              |              |              |
| Operating Voltage                      | AC 240/100 ±10%, 50Hz/60Hz   |              |              |              |              |



Shenzhen iDisplay Technology Co.,Ltd.

Add: 3rd Floor,5th Building, FLT industrial park, Longhua, Shenzhen, China  
Factory: 5th Building, No.6 of Xinhua Avenue, Chengjiang, Zhongkai, Huizhou, China  
Tel phone: 86-755-85280348  
E-mail: hello@idisplayled.com  
www.idisplayled.com




F Series (Foldable)

Foldable design for easy transport and quick installation, perfect for flexible applications and large-screen splicing.



Easily enter the elevator, No dedicated freight elevator required

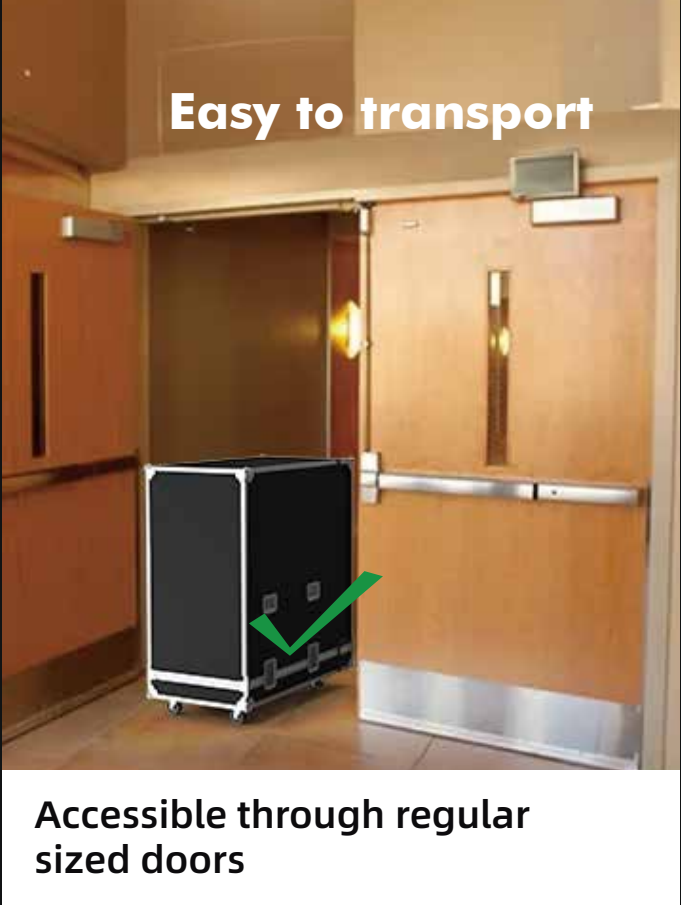

Accessible through regular sized doors



S Series (Standard)

Stand-alone design without folding, portable and easy to splice



Easy Control

Supports USB, HDMI, Wi-Fi for local control, and optional 4G transmission for remote access.



Package

